


PRODUCT DESCRIPTION

» According to DIN 6391C

MATERIAL

» Tempered steel, lacquered

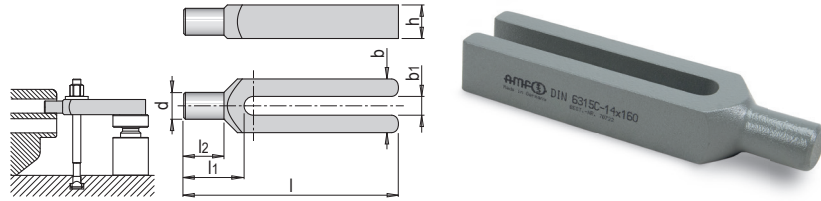

| b | d | h | l1 | l2 | M ¹⁾ | b1 | l | No. | EUR |
|----|----|----|----|----|-----------------|----|-----|----------------|-----|
| 30 | 12 | 15 | 30 | 18 | M8 | 9 | 100 | HWS 119/ 9/100 | <> |
| 30 | 16 | 20 | 36 | 24 | M10 | 11 | 125 | HWS 119/11/125 | <> |
| 40 | 20 | 25 | 45 | 30 | M12, M14 | 14 | 160 | HWS 119/14/160 | <> |
| 40 | 20 | 25 | 45 | 30 | M12, M14 | 14 | 200 | HWS 119/14/200 | <> |
| 50 | 24 | 30 | 55 | 36 | M16, M18 | 18 | 200 | HWS 119/18/200 | <> |
| 50 | 24 | 30 | 55 | 36 | M16, M18 | 18 | 250 | HWS 119/18/250 | <> |
| 60 | 30 | 40 | 65 | 45 | M20, M22 | 22 | 250 | HWS 119/22/250 | <> |
| 60 | 30 | 40 | 65 | 45 | M20, M22 | 22 | 315 | HWS 119/22/315 | <> |

1) M: Suitable for clamping screw