



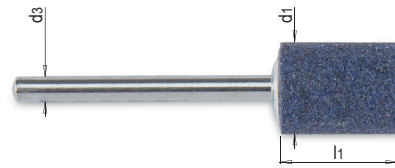



### PRODUCT DESCRIPTION

- » Shank Ø3 mm
- » Hard ceramic bond ensuring high dimensional stability
- » Made from a mixture of brown, dark red and white monocrystalline aluminium oxide
- » Excellent cutting performance
- » Especially suitable for tool steel and for alloyed and pre-toughened steel



Shape		d3	d1	l1	Grit	 Pcs. / PU	No.	EUR	
A1		Cylinder	3	3	6	100	10	V 72453/ A1/ 3x 6/100	<>
			3	3	6	100	10	V 72453/ A1/ 3x 6/100-L	<>
			3	4	8	100	10	V 72453/ A1/ 4x 8/100	<>
			3	6	10	100	10	V 72453/ A1/ 6x10/100	<>
			3	6	10	100	10	V 72453/ A1/ 6x10/100-L	<>
			3	8	10	100	10	V 72453/ A1/ 8x10/100	<>
			3	10	13	100	10	V 72453/ A1/10x13/100	<>
A3		Cylinder, ball nose	3	10	13	100	10	V 72453/ A3/10x13/100	<>
J1		Ball	3	4	-	100	10	V 72453/ J1/ 4/100	<>
			3	4	-	100	10	V 72453/ J1/ 4/100-L	<>
			3	6	-	100	10	V 72453/ J1/ 6/100	<>
			3	6	-	100	10	V 72453/ J1/ 6/100-L	<>
			3	8	-	100	10	V 72453/ J1/ 8/100	<>
			3	8	-	100	10	V 72453/ J1/ 8/100-L	<>
L1		Tree, pointed tip	3	5	10	100	10	V 72453/ L1/ 5x10/100	<>
			3	8	10	100	10	V 72453/ L1/ 8x10/100	<>

### REFERENCE VALUES

